

CORK STAIR

DOLLE®

This is the graphical presentation of some of the relevant design criterias to this stair.
The shown criteria are those that have the most direct impact for the actual use of the product.
For further details we refer to the relevant Norms:


The load of the stair is assessed according to Eurocodes:

DS/EN 1991-1-1: Eurocode 1: Actions on structures - Part 1-1: General actions



EN 1991-1-4:2007 Eurocode 1: Actions on structures - Part 1-4: General actions

EN 1993-1-8:2007 Eurocode 3: Design of steel structures - Part 1-8: Design of joints

The main cases are:

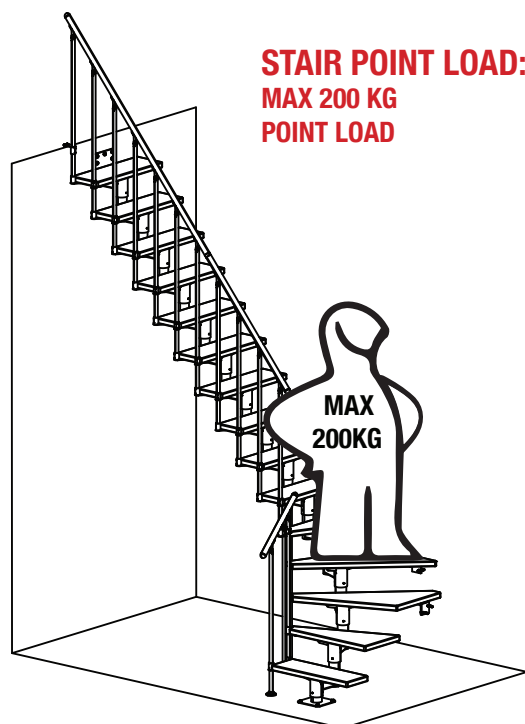

**STAIR SURFACE
LOAD:**
MAX 750 KG
TOTAL LOAD

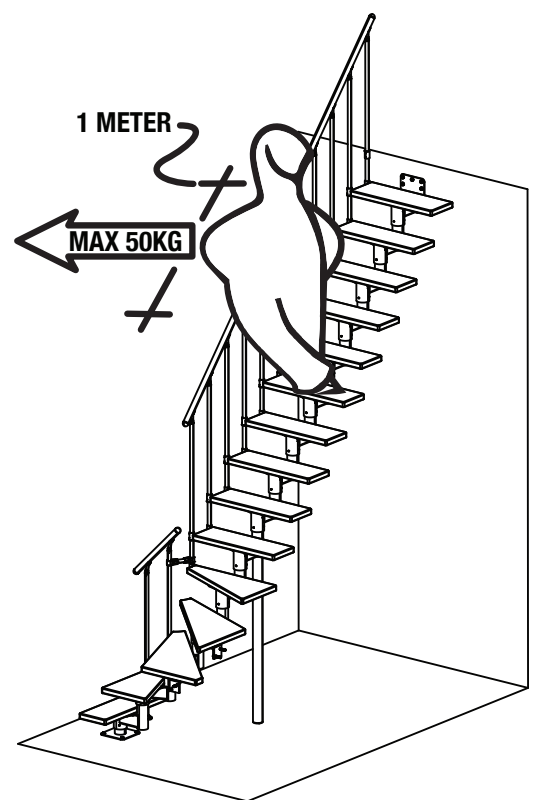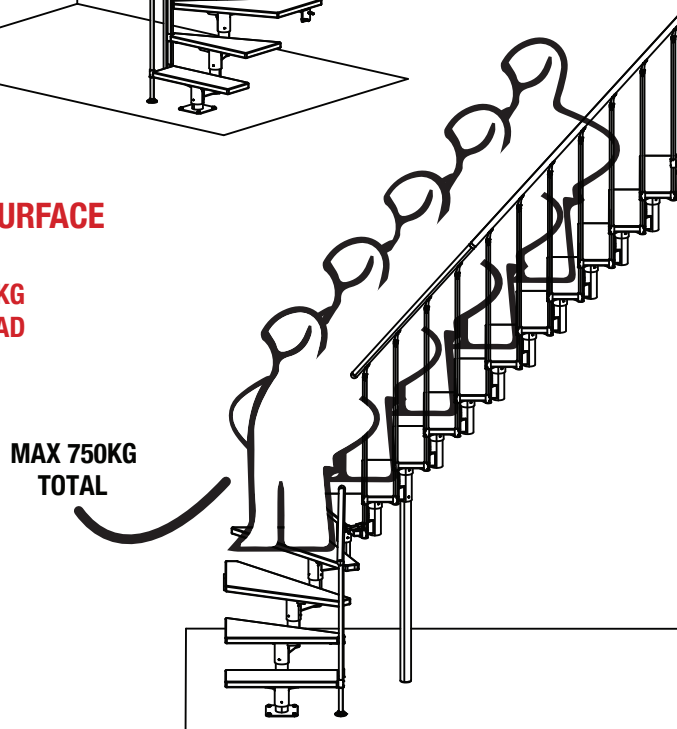

BANISTER LOAD:
MAX 50 KG
HORIZONTAL LOAD
PR 1 METER